

SOLSTICE® N15

(R-515B) Technical Data Sheet

Solstice® N15 (R-515B) is a non-flammable azeotropic blend designed for medium-temperature commercial refrigeration and high-temperature cooling systems. This hydrofluoroolefin (HFO) blend demonstrates environmental and performance benefits in new systems.

APPLICATIONS

- Medium-temperature
- New equipment
- Remote condensing units
- Supermarket multi-plex systems
- Stand-alone units
- Medium temperature side of cascade systems
- Flooded systems
- High ambient air conditioning

MATERIALS COMPATIBILITY

Honeywell does not recommend the use of chlorinated solvents to clean refrigeration systems or components.

Desiccants

Desiccant driers compatible with Solstice® N15 (R-515B) are commercially available. Individual drier manufacturers should be contacted for specific recommendations.

Lubricants

Polyol ester (POE) oil is recommended for Solstice N15. Compressor manufacturers typically qualify specific lubricants for use with their products. Users should check with the equipment manufacturer for the recommended lubricants for their system.

Plastics and Elastomers

Solstice N15 is compatible with most common materials. In the case of retrofit systems that may contain chlorinated materials, please contact your Honeywell sales representative for specific information.



BENEFITS

- Non-flammable
- Reduced GWP: 77% lower than R-134a
- Efficiency comparable to R-134a
- Zero glide
- Low discharge temperatures

PHYSICAL PROPERTIES

GENERAL PROPERTIES	
Class/Type	Azeotropic blend
Formula	R-1234ze / R-227ea (91.1% / 8.9%)
Appearance	Colorless
ODP	0
GWP 5th IPCC	299
Flammability limits – ASTM E681-04 @21°C	Nonflammable
ASHRAE Standard 34 class	A1
LFL (%vol)	Nonflammable
UNITS	
Molecular weight	117.5 lbm/lb-mol
Boiling temperature @ Opsig	-2.0°F
Critical temperature	228.0 °F
Critical pressure	507 psig
Critical volume	0.0322 ft³/lbm
Critical Density	31.03 lbm/ft³
Vapor Density At Opsig Boiling Point	0.367 lbm/ft³
Liquid Density At 32°F	78.56 lbm/ft³
Liquid Density At 77°F	73.65 lbm/ft³
Vapor Density At 77°F	1.69 lbm/ft³
Liquid Heat Capacity At 77°F	0.33 Btu/lbm-°F
Vapor Heat Capacity At 77°F	0.23 Btu/lbm-°F
Heat Of Vaporization At Boiling Point	81.7 Btu/lbm
Saturated Pressure At 77°F	57.45 psig
Liquid Thermal Conductivity At 77°F	0.042 Btu/hr-ft-°F
Vapor Thermal Conductivity At 77°F	0.008 Btu/hr-ft-°F
Liquid Viscosity At 77°F	0.4864 lbm/ft-hr
Vapor Viscosity At 77°F	0.0299 lbm/ft-hr

SAFETY AND STORAGE

Honeywell recommends reading the Safety Data Sheet (SDS) before using Solstice N15. According to the compressed gas classification, Solstice N15 is nonflammable. It has similar storage and handling requirements to R-134a in bulk and cylinder.


PACKAGE SIZES

Solstice N15 is available in 100lb and half ton refillable cylinders. For other packaging sizes please contact Honeywell distribution network.

LEAK DETECTION

Leak detectors can be used for pinpointing specific leaks or for monitoring an entire room on a continual basis. Leak detection is important for refrigerant conservation, equipment protection and performance, reduction of emissions and protection of those coming in contact with the system. Customers should consult the equipment manufacturer for appropriate detectors.

PRESSURE AND ENTHALPY

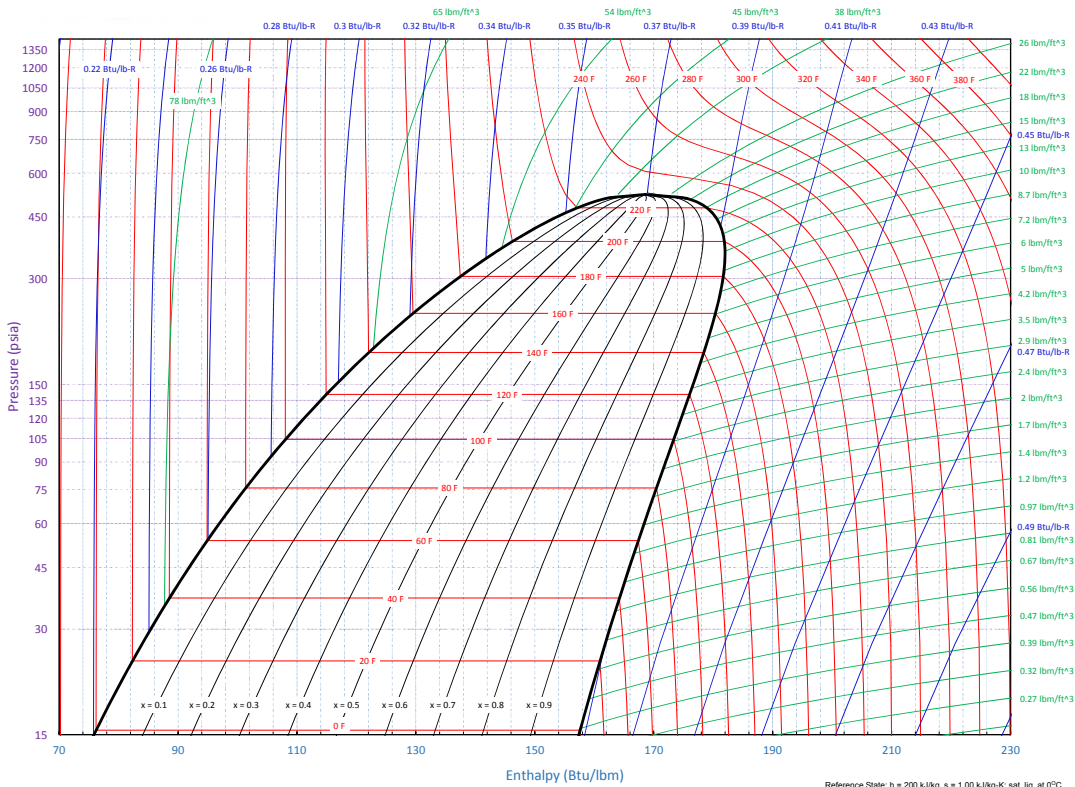

HONEYWELL PT CHARTS

R-515B

Temperature (°F)	Pressure (psig)
0	0.7
2	1.5
4	2.3
6	3.1
8	3.9
10	4.8
12	5.7
14	6.6
16	7.6
18	8.6
20	9.6
22	10.7
24	11.8
26	13.0
28	14.2
30	15.4
32	16.6
34	17.9
36	19.3
38	20.7
40	22.1
42	23.6
44	25.1
46	26.7
48	28.3
50	29.9
52	31.6
54	33.4
56	35.2
58	37.1
60	39.0
62	40.9
64	42.9
66	45.0
68	47.2
70	49.3
72	51.6
74	53.9
76	56.2
78	58.7
80	61.2
82	63.7
84	66.3
86.0	69.0
88.0	71.7
90.0	74.6
92.0	77.4
94.0	80.4
96.0	83.4
98.0	86.5

Temperature (°F)	Pressure (psig)
100.0	89.7
102.0	92.9
104.0	96.2
106.0	99.6
108.0	103.1
110.0	106.6
112.0	110.3
114.0	114.0
116.0	117.8
118.0	121.6
120.0	125.6
122.0	129.6
124.0	133.8
126.0	138.0
128.0	142.3
130.0	146.7
132.0	151.2
134.0	155.7
136.0	160.4
138.0	165.2
140.0	170.1
142.0	175.0
144.0	180.1
146.0	185.3
148.0	190.5
150.0	195.9
152.0	201.4
154.0	207.0
156.0	212.7
158.0	218.5
160.0	224.4
162.0	230.4
164.0	236.5
166.0	242.8
168.0	249.2
170.0	255.7



For more information visit

www.fluorineproducts-honeywell.com/refrigerants

Honeywell Refrigerants

115 Tabor Road
Morris Plains, NJ 07950
800-631-8138

Although Honeywell International Inc. believes that the information contained herein is accurate and reliable, it is presented without guarantee or responsibility of any kind and does not constitute any representation or warranty of Honeywell International Inc., either expressed or implied. A number of factors may affect the performance of any products used in conjunction with user's materials, such as other raw materials, application, formulation, environmental factors and manufacturing conditions among others, all of which must be taken into account by the user in producing or using the products. The user should not assume that all necessary data for the proper evaluation of these products are contained herein. Information provided herein does not relieve the user from the responsibility of carrying out its own tests and experiments, and the user assumes all risks and liabilities (including, but not limited to, risks relating to results, patent infringement, regulatory compliance and health, safety and environment) related to the use of the products and/or information contained herein.

5286 FP | January 2020
© 2020 Honeywell International Inc.

Honeywell